
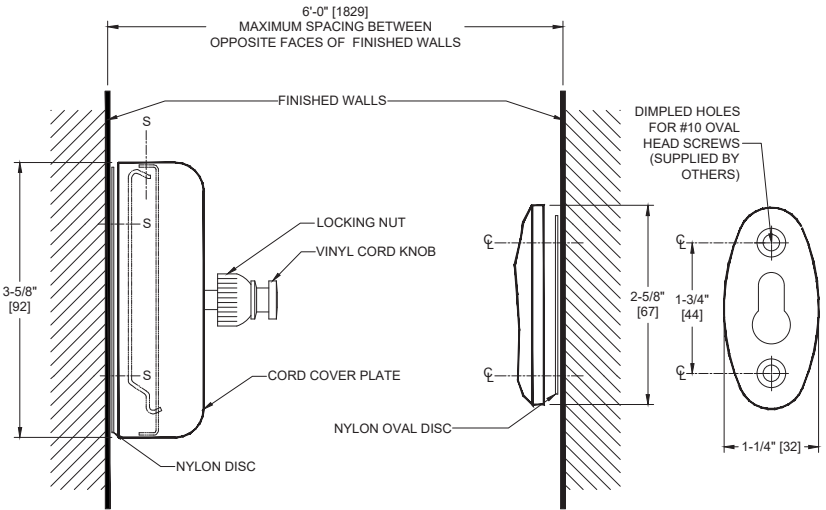


Retractable Clothes Line – Surface Mounted

Specialty Accessories

MasterFormat Section 10 28 13

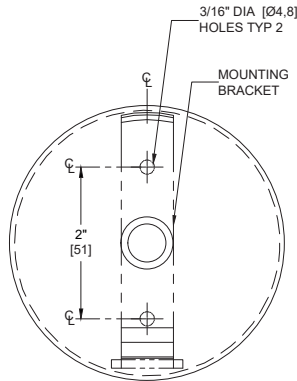

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Includes cord cover plate, locking nut and knob retainer – stainless steel with bright finish. Nylon gaskets are supplied to isolate flanges from finished wall surface. Unit includes spring actuated reel with 72" [1829] vinyl covered cord. Cord knob is white vinyl. Locking knurled nut to hold stretched line taut is also provided on cord cover. Installs over bathtub or in shower. The clothes line is retracted into the cover plate mechanism by first releasing the locking nut and then removing the cord knob from the knob retainer, thereby allowing the spring mechanism to automatically retract the clothes line.

KEY FEATURES & SPECIFICATIONS

- Retractable
- Type 304 stainless steel alloy 18-8 with bright finish
- 72" [1829] vinyl covered cord
- Surface Mounted
- Cord knob is white vinyl

OPERATION & MAINTENANCE

Release the locking nut, grasp the vinyl cord knob and pull out a sufficient amount to clothes line to permit attaching the cord knob to the knob retainer. Tighten locking nut sufficiently to hold stretched line taught. The clothes line is retracted into the cover plate mechanism by first releasing the locking nut and then removing the cord knob from the knob retainer, thereby allowing the spring mechanism to automatically retract the clothes line.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	3-5/8" diameter Cord Cover Plate [Ø92]; 6'-0" max. Cord Length [1829]
Construction	Type 304 Stainless Steel - Bright Finish
Mounting	Surface Mounted
Capacity	

INSTALLATION

For compliance with 2010 ADA Accessibility Standards, install unit so that cord knob is 48" [1219] maximum Above Finished Floor (AFF). Surface mount cord cover plate mounting bracket and nylon disc to wall with two self-threading screws (supplied by others). Install cord cover plate over bracket and nylon disk. Secure cover plate in place by screwing the set screw in the top of the bracket. Surface mount knob retainer and oval nylon disc on opposite wall with two self-threading screws (supplied by others). For masonry walls, installer shall provide fiber plugs or expansion shields. For dry walls or plaster walls, installer shall provide concealed backing or toggle bolts to comply with local building codes and to suit wall conditions.

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice