



9590

Fire Door Bottom Gap Solution — *Up To 90 Minutes*

PRODUCT CUT SHEET

UL Certified for Door Bottom
Gaps — Measuring up to 1½".



- 90-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Restricts the Passage of Smoke
- Patent Pending
- Available in 36" and 48" Lengths
- End Caps Furnished Standard
- Non-Handed


PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
- + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 X ¾" Stainless Steel SMS Furnished

FINISH:

Brushed Stainless Steel
Neoprene is Black

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

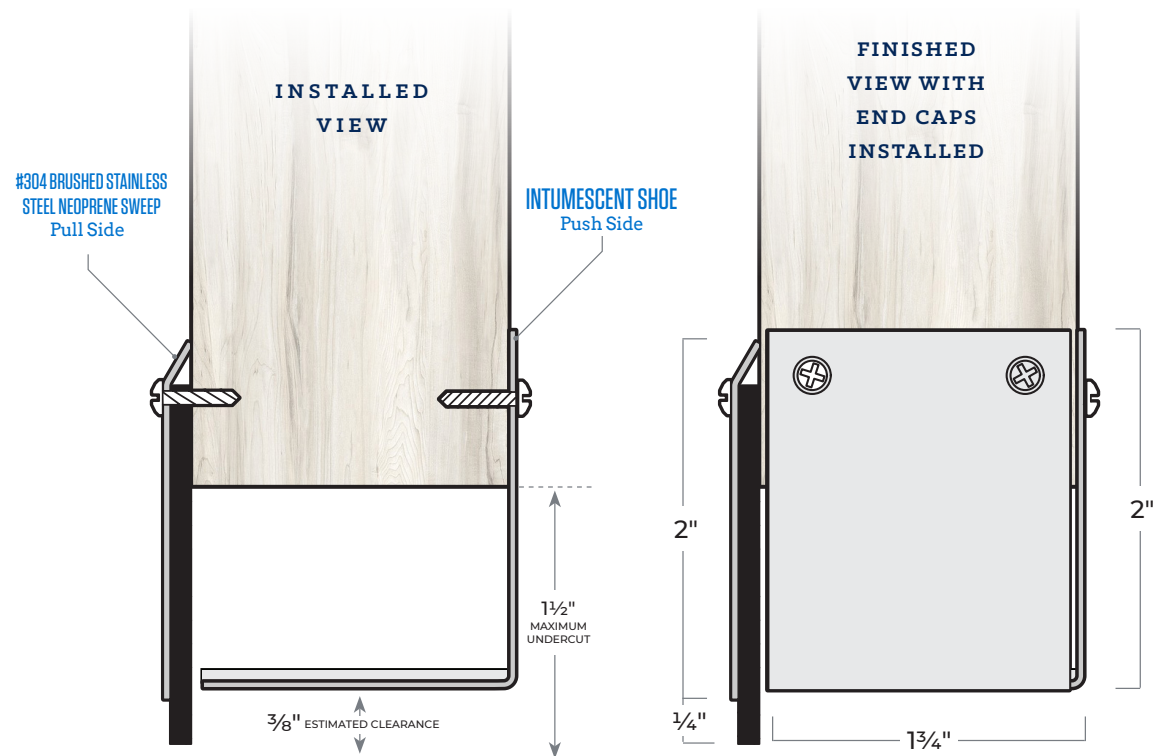

NGP-GAP-9590-PCS-0919-A