


Inverted "V" With 60% Free Area Recommended for Buildings Where All-Aluminum Construction is Desired, or for Humid Environments



1300A1
Photo &
Drawing

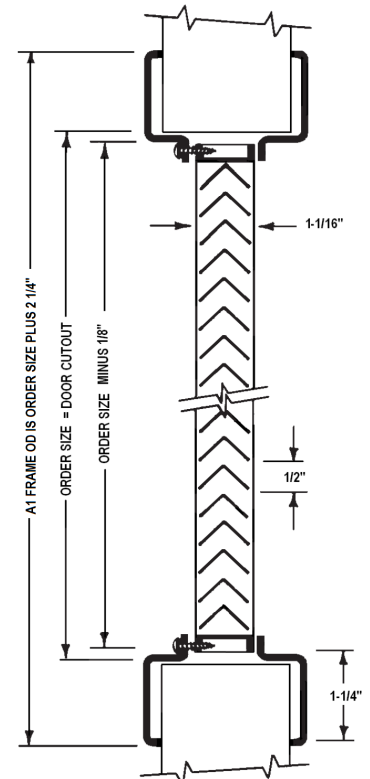

SPECIFICATIONS:

Material:	Formed from .050 aluminum. Min size 6" x 4", Max 24" x 80". Multiple sections can be combined for larger sizes
Construction:	Louvers: "V" blades with 1/2" blade spacing are attached by interlocking construction to the 1-1/16" deep, welded frame. Frame: 1-1/4" trim, mitered and welded corners. Screws fasten through frame into louver core, leaving corridor side of frame free of fasteners.
Door:	_____ 1-3/4" - Any Style. Door cutout = order size. _____ 1 3/8"-1 3/4" - 1300CORE, 1300C, 1300A
Mounting Options:	_____ Select one mounting option from table below.
Fasteners:	#8 x 3/4" Phillips head screws to match finish.
Powder Coat Finishes:	_____ (SI) Silver (standard color) _____ (G) Gray _____ (BK) Black _____ (FBK) Flat Black _____ (W) White _____ (SB) SC Beige _____ (B) Mineral Bronze _____ (S) Sand _____ (AB) AMS Beige _____ (BRA) Brass Color Samples Online
Fasteners:	#8 x 3/4" Phillips head screws.
Free Flow Area:	60% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Fasteners:	_____ Torx _____ Other: _____
Screen:	_____ 18x14 mesh insect screen installed in roll formed aluminum frame to corridor side of louver for A1 style. CORE, C and A styles install to room side. _____ aluminum _____ bronze _____ fiberglass _____ stainless _____ Bird Screen.
Custom:	Custom sizes, other door thicknesses— contact customer service..

DOOR MOUNTING OPTIONS - SELECT ONE	
1300A1: Self-attaching, vandal-proof design; basic blade unit with flanged frame welded to face (corridor) side and separate removable flanged frame on opposite side; fits 1-3/4" thick doors only.	
1300 CORE : Basic blade unit only for interior doors; or as transom louver held in place with wood or metal moulding (by others); any door size.	
1300C: Basic blade unit with single flanged frame welded to face (corridor) side. Wood or metal moulding (by others) used on opposite side; fits any size door.	
1300A: Basic blade unit with flanged frame welded to face (corridor) side and separate flanged frame on opposite side; frame adjustable to fit any door thickness from 1-3/8" to 1-3/4".	

Order Format:	1300	_____	_____	_____	_____
Example: 1300A1 1212SI	A,A1,CORE,C	W	H	Optional Color	

	Distributor:	Width: _____ x Height: _____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: _____ Version: ALPDS1901
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218		
Visit WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION © 2019 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC		
Mfg: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		