




This Adjustable Z-Blade Louver with Fusible Link is Ideal for Use in Fire Doors up to 1-1/2 Hour Rating. Ideal for Installation in Existing Door Cutouts.

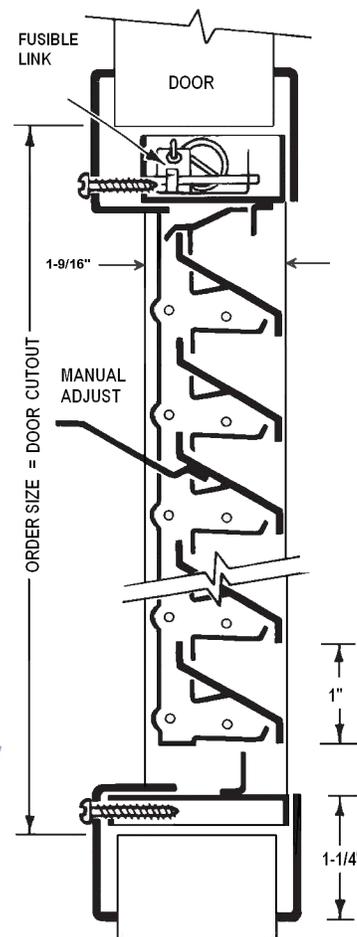

SELF-ATTACHING FRAME

SPECIFICATIONS:

Material:	18 gauge (.048") CRS frame. Min size 10" x 6", Max 24" x 24".
Construction:	Louver: Z-blade louvers riveted to operating bar and frame at 1" intervals to welded 1-9/16" deep frame. Mechanical stop 5/8" x 3/8" x 16 ga. (.048") holds blades open. Frame: Mitered and welded corners; screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners.
Operation:	Adjustable blades of 16 gauge (.059") CRS pivot on cadmium-plated steel rivets. The blades are operated by a manual adjusting lever. A spring loaded fusible link mechanism is incorporated into the design. Upon melting of the link at 165° F, the action bar is actuated, thereby closing and locking all of the blades.
Door :	For 1-3/4" steel or composite doors. Door cutout = order size.
Fasteners:	#8 x 3/4" Phillips flathead screws to match finish.
Powder Coat Finishes:	___ (B) Mineral Bronze (standard color) ___ (G) Gray ___ (BK) Black ___ (FBK) Flat Black ___ (W) White ___ (SB) SC Beige ___ (SI) Silver ___ (S) Sand ___ (AB) AMS Beige ___ (BRA) Brass Color Samples Online
Free Flow Area:	45% free area.

OPTIONAL FEATURES AT AN ADDITIONAL COST:

Finishes & Materials:	___ (E) Electro Galvanized for corrosion resistance & exterior use.
Fasteners:	___ Torx ___ Other: _____
Screen:	___ Insect Screen: Attached to the Corridor Side. ___ aluminum ___ bronze ___ fiberglass ___ stainless ___ Bird Screen: Attached to the Corridor Side.
Custom:	Custom sizes—contact customer service.

Order Format: 1900A ___ ___ ___ ___
Example: 1900A 1212B Option E W H Color

LISTINGS & RATINGS:



Fire Ratings with UL & WHI Classification Marks Tested & Listed for UL10C, and classified in accordance with UBC7-2-94, ASTM E152, CAN/ULC S104, NFPA 252. Install in accordance with NFPA80.

Model 1900A is Rated for use in fire doors up to 1-1/2 hour rating. Louver size shall not exceed maximum of 576 sq. inches, 24"W and 24" H. The minimum width and height shall not be less than 10" and 6", respectively. Louvers may be provided for classified hollow metal type and composite type fire doors.

Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards. Louver frame will be labeled with Listing mark.

STOCK ITEM— SEVERAL SIZES OF 1900A IN STOCK FOR NEXT DAY SHIPMENT FROM MANY OF OUR WAREHOUSES

	Distributor: _____	Width: ___ x Height: ___
	Architect: _____	Quantity: _____
	Contractor: _____	Model: _____
	Project: _____	Date: _____ Version: ALPDS1901
800-554-6077 QUOTES@ACTIVARCPG.COM ORDERS@ACTIVARCPG.COM SALES@ACTIVARCPG.COM FAX: 952-835-2218 VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION © 2019 ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC MFG: COMMERCE CA, BLOOMINGTON, MN • WAREHOUSES: LANCASTER PA, ATLANTA GA, CHICAGO IL, SEATTLE WA, FORT MYERS FL, DALLAS TX, FARGO ND, OMAHA NE		