

# Trim Selection

## ESCUTCHEON LEVER DESIGN



### CONSTRUCTION

- Free-wheeling clutch mechanism.
- Grade 1, thru-bolting design. Reversible design
- Hardened steel heavy duty tailpiece.
- Available for Rim Exit Devices


### DOOR THICKNESS

Standard 1 3/4"

### ESCUTCHEON DIMENSIONS

1 13/16" width x 8" length

Lever length: 5"

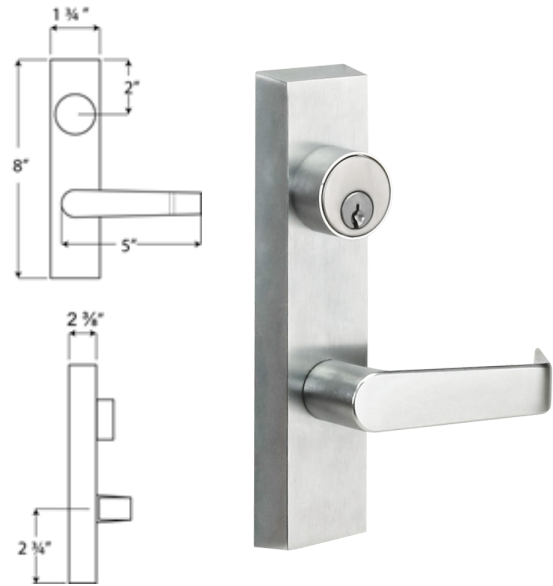

**IMPORTANT: GLS9800 Trims can be used with GLS7700 Exit Devices**

#### NOTES:

- AT, RL, TUB lever design is available upon request.
- **ELECTRIFICATION NOT AVAILABLE FOR TRIM**
- Electrical Latch Retraction (ELR), Request to Exit (RX) and Latchbolt Monitoring (LX) available for Exit Device only.
- Anti-Microbial Coating available in US26D Only. Use part # **"ANTB-TRIM"** when ordering.

<b>GLSRIM9800</b>	<b>ENTRANCE</b>
• <b>ICGLSRIM9800</b>	Clutch free-wheeling Entrance,
• <b>ICSCGLSRIM9800</b>	key locks or unlocks escutcheon trim ANSI Function (08). Operates as classroom function
<b>GLSRIM9805</b>	<b>STOREROOM</b>
• <b>ICGLSRIM9805</b>	Clutch free-wheeling Storeroom,
• <b>ICSCGLSRIM9805</b>	key unlocks lever, lever retracts latch bolt, otherwise always locked. ANSI Function (09)
<b>GLSRIM9830</b>	<b>PASSAGE</b>
	Trim always operable and free ANSI Function (14)
<b>GLSRIM9840</b>	<b>DUMMY</b>
	Dummy Escutcheon trim ANSI Function (02)

**KEYWAY:** 6-Pin solid brass "C" keyway Mortise Cylinder standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

- **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW
- **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.


# Trim Selection

## PULL DESIGN - FOR GLS9800 RIM EXIT DEVICE ONLY




### 98GLSNL ⌘ IC98GLSNL ⌘ ICSC98GLSNL

Outside by pull and key.  
Key retracts latch bolt.  
ANSI Function (03)  
(SPECIFY HANDING)

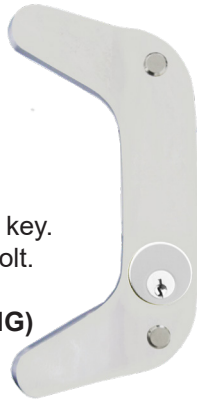

### 98GLSUP

Outside by pull only.  
Pull when dogged.  
ANSI Function (02)  
(NON-HANDED)

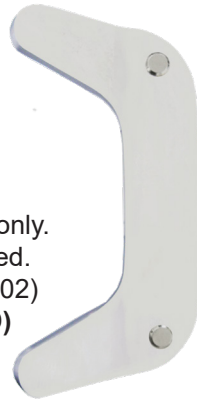

### GLSRIMEOP

Outside cover plate  
only.  
ANSI Function (01)






### KEYWAY

Standard 6-Pin solid brass "C"  
keyway Rim Cylinder included.

### FINISHES

Architectural plated finishes.




### 98GLSCYL-1



### ⌘ IC98GLSCYL-1 ⌘ ICSC98GLSCYL-1



### OFSTPUL-10 (REVERSIBLE)

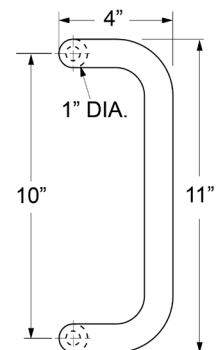

**KEYWAY:** 6-Pin solid brass "C" keyway Rim Cylinder standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

⌘ **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW

⌘ **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.