

Trim Selection

RIGID LEVER ESCUTCHEON



CONSTRUCTION

- Grade 1, thrubolted design, rigid non-clutch, Non handed design.
- Easily field reversible.
- Hardened steel heavy duty tailpiece. Available for fire and non-fire rated rim and vertical rod exit devices.
- Standard 6-Pin Schlage "C" Mortise Cylinder included

FINISHES

- Powder coated aluminum (alum)
- Powder coated dark bronze duranodic (duro)
- Powder coated gold

DOOR THICKNESS

Standard 1 3/4". For 2 1/4" thick door use additional PART # TAIL3.


ESCUTCHEON DIMENSIONS

2 3/4" width X 8 3/4" length. Lever length: 4 3/4".

Fits and covers 2 1/8" 161 cutout



NESC2200 or • ICNESC2200 or • ICSCNESC2200	ENTRANCE Rigid Entrance, key locks or unlocks escutcheon trim ANSI FUNCTION (63) Operates as classroom function
NESC2205 or • ICNESC2205 or • ICSCNESC2205	STOREROOM Rigid Storeroom, key unlocks lever, lever retracts latch bolt, otherwise always locked ANSI FUNCTION (04)
NESC2230	PASSAGE Trim always operable and free ANSI Function (62)
NESC2240	DUMMY Dummy Escutcheon trim ANSI FUNCTION (10)

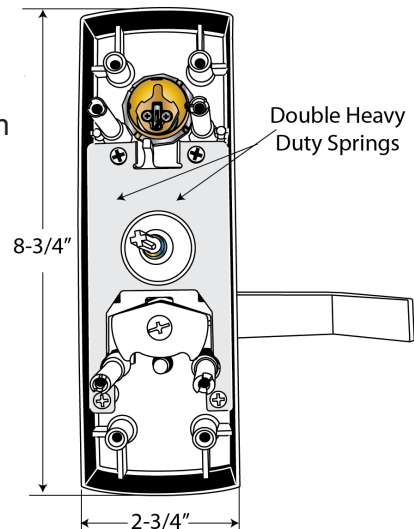

KEYWAY: 6 pin solid brass "C" keyway Mortise Cylinder standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

• **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW

• **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.

FOR ELECTRIFIED TRIM OPTIONS SEE PAGE 64