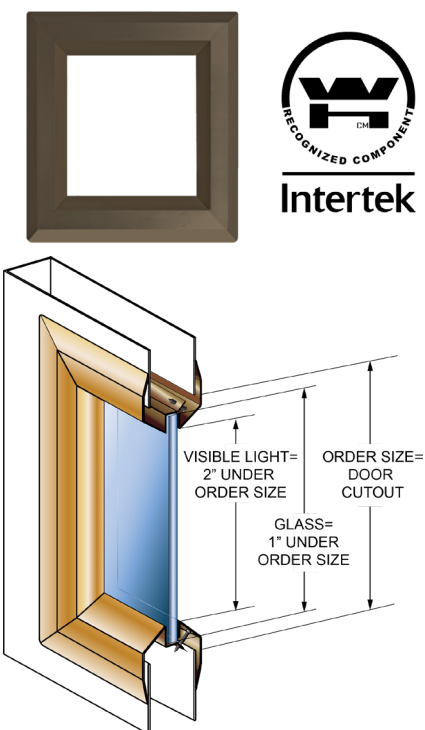



20-180 Minute Fire-Rated Steel Vision Kits*

SVL , Vision Lite Low Profile

ILLUSTRATION	SPECIFICATIONS
 <p>The illustration shows a top-down view of a square frame and a cross-section diagram. The cross-section diagram labels the 'VISIBLE LIGHT= 2" UNDER ORDER SIZE' and 'GLASS= 1" UNDER ORDER SIZE'. The 'ORDER SIZE= DOOR CUTOUT' is also indicated.</p>	<p>For use in fire rated door applications under positive and neutral pressure. Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN / ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p>
	<p>Specifications:</p> <ul style="list-style-type: none"> - Low Profile Beveled Vision Lite; 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - Designed for use with 1 3/4" doors only. For use with 3/16" to 1/4" glass thickness - Standard Color: Dark Bronze (DB) - Also available in Grey (PR), White (W), SC Beige (SB), & Flat Black (FBK) in selected sizes only - Custom colors available, see color chart on page 1 - Fastener: # 8 x 7/8" flathead phillips head SMS
	<p>Kit Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape. - Available glass types are Fire Rated Pyran® Platinum F Glass (3/16"), TEMP20 (1/4"), PROTECT3™ Wired Safety Glass (1/4"), and Non-Fire Rated Tempered (1/4").
	<p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size. Visible vision opening is 2" under order size - Glass size dimension is 1" under complete order size - Dimensions are written width (W) x height (H) * Refer to price list for list of fire rated sizes * Custom sizes are available. See price list.

VL , Vision Lite Standard Profile for 3/16" to 1/4" Thick Glass Frames

10VL , Vision Lite Standard Profile for 1" Thick Glass Frames

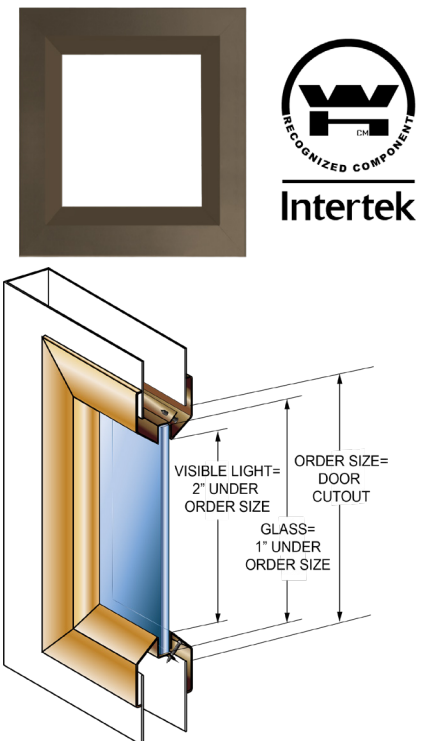ILLUSTRATION	SPECIFICATIONS
 <p>The illustration shows a top-down view of a square frame and a cross-section diagram. The cross-section diagram labels the 'VISIBLE LIGHT= 2" UNDER ORDER SIZE' and 'GLASS= 1" UNDER ORDER SIZE'. The 'ORDER SIZE= DOOR CUTOUT' is also indicated.</p>	<p>For use in fire rated door applications under positive and neutral pressure Intertek testing certification in compliance to NFPA 252 (2000), UL 10C (2009), CAN/ULS104 (2010), NFPA (201) and CSI CODE 0870 00.</p>
	<p>Specifications:</p> <ul style="list-style-type: none"> - Standard Profile Beveled Vision Lite; 20 Gauge Cold Rolled Steel - Mitered welded corners with counter sunk mounting holes - Single side attaching with matching mounting screws included - Also available for 1" glass thickness (10VL Series) - Designed for use with 1 3/4" doors only; For use with 3/16" to 1/4" glass thickness - Standard Color: Dark Bronze (DB); also available in Grey (PR - Prime Coat) in selected sizes only - Custom colors available, see color chart on page 1 - Fastener: # 8 x 7/8" flathead phillips head SMS
	<p>Kit Options:</p> <ul style="list-style-type: none"> - Also available as a KIT or bundle which comes with the Frame, Glass and Glazing Tape. - Available glass types are Fire Rated Pyran® Platinum F Glass (3/16"), TEMP20 (1/4"), PROTECT3™ Wired Safety Glass (1/4"), and Non-Fire Rated Tempered (1/4").
	<p>Notes:</p> <ul style="list-style-type: none"> - Order size is equal to opening size, Glass size dimension is 1" under complete order size - Visible vision opening is 2" under order size - Dimensions are written width (W) x height (H) * Refer to price list for list of fire rated sizes * Custom sizes are available. See price list.