

The background of the page is a photograph of a light-colored door with a large glass pane. A DORMA ED900 door operator is mounted on the top of the door frame. The operator is a long, horizontal, light-colored metal unit. A silver-colored handle is visible on the right side of the door. The door is slightly ajar, revealing a view of a green field and trees outside.

ED900

Low Energy Operator

ED900 LOW ENERGY OPERATOR



Innovative Technology

With an innovative electromechanical drive and state-of-the-art microprocessor motion control system, the ED900 is DORMA's most advanced low-energy swing door power operator. The operator is exceptionally quiet, safe, and easy to use.

When operated manually, the ED900 demands little physical effort. Advanced power assist through the entire opening cycle makes even the heaviest-rated door feel light.

Fully ADA Compliant

The new operator is especially helpful for children, the elderly, persons with disabilities, or those carrying objects or pushing carts. This fully ADA-compliant device opens doors at precisely controlled speeds and forces, assuring safety for all users.

Advanced Features

The ED900 also includes a blow-open feature for smoke ventilation (per NFPA 92B), permanent hold-open, and an onboard power supply delivering 1.5 amps @ 24 VDC, which eliminates the need for a secondary power supply. It includes programmable options to accommodate even the most challenging door installations. In addition, the ED900 boasts the smallest footprint in the industry—up to 65 percent smaller than some other manufacturers' operators.

Features

Advanced Power Assist (Helping Force) through entire opening cycle. When opened manually, even the heaviest rated door feels about 5 lb.

Blow Open for integration into smoke ventilation systems per NFPA 92B.

Permanent Hold Open triggered two ways: (1) by onboard toggle switch or (2) by input from a remote source.

Obstacle Detection closes the door if an obstacle is detected during the opening cycle and reopens the door if an obstacle is detected during the closing cycle.

Push & Go triggered by manually opening the door 4° from the closed position.

Onboard Power Supply delivers an unprecedented 1.5 amps @ 24 VDC:

- 3x more power than the competition.
- No need for separate power supply.
- Powers most EAC devices, including DORMA's motorized latch retraction (MLR) exit device, electromagnetic locks, electric strikes, RF receivers, illuminated push buttons, wall switches, presence detectors, motion sensors, and key pads.

Motion and Presence Sensors can be installed on both push and pull side of the opening.

Closing Speed and Latching Force under power failure conditions are field-adjustable as part of installation set-up and commissioning.

Positive Mechanical Stops with both Pull Side track mount and Push Side arms are included. In the event of power failure conditions, the stops prevent the door from opening past 90° or a pre-determined opening angle.

Vestibule Function Synchronizing Options—Contact DORMA Technical Service.


Synchronized Integration for Pair of Doors monitors both doors to open and close at the same speed.

Pull Side or Push Side Applications

Full Complement of Painted and Architectural Finishes—custom and designer.

Self-diagnosing Status Indicator—LED display error code messages.

ED900 Dimensions

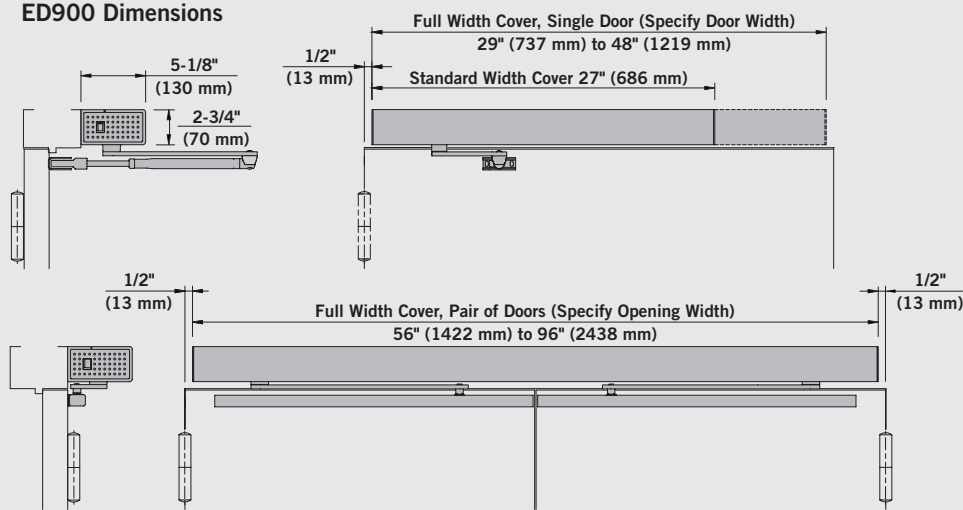

ED900 LOW ENERGY OPERATOR

ED900—DORMA'S
innovative, whisper quiet
low energy operator with
electromechanical drive
and advanced power assist.



Technical Specifications

Power Requirements	115 VAC +/-10%, 50/60 Hz, 6.6 A max Branch Circuit Protection: 15 A min
Onboard Power Supply for Access Control Devices	1.5A @ 24 VDC
Max Door Size	48" (1219 mm) wide 220 lb (100 kg)
Operator Weight	26.5 lb (12 kg)
Operating Temperatures	5° F to 122° F (-15° C to 50° C)
Standard Operator Dimensions	27" W x 2-3/4" H x 5-1/8" D (685 mm x 70 mm x 130 mm)
Max Opening Angle	Powered: 110° Manual: 180°
Non-handed	
On-board Cycle Counter	

Certifications, Listings & Approvals

- ANSI/BHMA 156.19 Power Assist and Low Energy Power Operated Doors
- UL/CUL Listed for Fire Door Operators with Automatic Closers
- ICC/ANSI A117.1 Accessible and Useable Buildings and Facilities
- Underwriters Laboratories — ANSI/UL 325 Door, Drapery, Gate, Louver, and Window Operators and Systems
- California State Fire Marshal (CSFM) approved



Warranty

For details, refer to **DORMA Limited Warranty** on our website at go.dorma.com/terms.

For mounting options and available accessories, please call Technical Support or your local DORMA representative.

Programmable Options

Back Check & Latching Angles	
Opening Cycle	From 0 to 30 seconds.
Hold Open Time	
After Hours Access	From 0 to 30 seconds.
Hold Open Time	
Day/Night (Push-Pull)	Unlocking during business hours.
Delayed Unlocking	From 0 to 400 milliseconds. Use with electromechanical access control peripherals such as electric strikes or exit devices with electric latch retraction.
Closing Force Prior to Unlocking	Works with the Delayed Unlocking feature and accommodates reduction of latch bolt locking force prior to releasing the electromechanical access control device.
Latching Action Force	Power boost during latching cycle to overcome resistance for door seals, locking devices, or door/frame misalignment.
Latching Action Angle	For engaging the programmable latching action feature: Opening angle range 2° to 5°.
Keep Closed Force	Designed to keep the door in the closed position when unlocked.
Wind Load Control	Opening and closing cycles. Variables: Door size and weight, hinging, alignment, wind loads, HVAC imbalance. Forces measured at the door must conform with ANSI 156.1 to maintain ADA compliance.
Door Position Status	Monitors when door has reached fully open or fully closed position. Can communicate status to external monitoring device or console.
Synchronized Pair of Doors Integration	Opening of the second door can be delayed by up to 30° of when the first door is opened.



HOW TO ORDER ED900 SERIES

Low Energy Swing Door Operator — **Model 900**

Mount/Arm

- T** — Pull Side Track Mount
- J8** — Push Side Top Jamb Mount, 0-8"
- J19** — Push Side Top Jamb Mount, 8-19" Reveal

Options

- PC** — Power Cord
- CB** — Conduit Box

Series **ED** **900** **PR** **Applications** **SW** **689**

Cover

- SW** — Standard Width
- FWS** — Full Width, Sgl. Door, Seamless Cover
- FW2** — Full Width, Sgl. Doors 2 piece cover
- FWPRS** — Full Width, Pair of Doors, Seamless Cover
- FWPR3** — Full Width, Pair of Doors, 3-Piece

Plated

- 605** — Bright Brass
- 606** — Satin Brass
- 611** — Bright Bronze
- 612** — Satin Bronze
- 613** — Oxidized Satin Bronze
- 618** — Bright Nickel
- 619** — Satin Nickel
- 625** — Bright Chrome
- 626** — Satin Chrome

Painted

- 600** — Primed
- 689** — Aluminum
- 690** — Statuary Bronze
- 691** — Dull Bronze
- 693** — Black
- 695** — Dark Duranodic Bronze
- 696** — Gold
- Custom** — Custom Painted Finish
- Designer** — Designer Painted Finish

Finish

FWPRS
Seamless Full Width Cover for Pair of Doors, From 56" (1422 mm) to 96" (2438 mm)

FWPR3
Full Width Pair of Doors, includes two 27" Standard Width Covers, and extension cover to fill remaining opening, up to 35" (889 mm).



DORMA USA, Inc.
Dorma Drive, Drawer AC
Reamstown, PA 17567
800-523-8483
www.dorma.com