




PRODUCT SPECIFICATIONS
For more information visit www.hagerco.com

5200 Series x Hold Open Arm- 5910

5200 Closer x 5910 Hold Open Arm

Applications

Grade 1 Heavy Duty Surface Door Closer adjustable sizes 1-6
Ideal for schools, hospitals, and other high-use environments

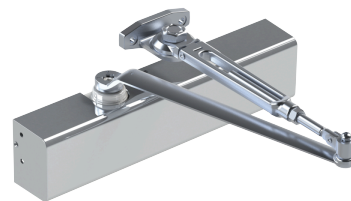

PRODUCT SPECIFICATIONS

Arm:

5910 - Hold Open Arm

Box Quantity:

1

Case Quantity:

6

Certifications:

BHMA Certified ANSI A156.4, adjustable sizes 1-6
ADA compliant ANSI A117.1 Accessibility Code
UL/cUL Listed for up to 3 hours
UL10C Positive Pressure Rated
UL10B Neutral Pressure Rated
5200 Door Closer EPD

Cover:

Full plastic cover - Standard
Slim line plastic cover - Optional
Full size plated metal cover - Optional

Door Thickness:

1-3/4" (44 mm) - standard
1-3/8" - 2-1/4" (36 mm - 57 mm) thick door - optional

Fasteners:

Self-reaming, self-tapping wood and machine screws
Sex nuts and bolts

Handing:

Non-handed

Material:

Forged steel arm

Maximum Door Weight:

250 lbs.

Notes:

To maximize hinge life and assist in achieving ADA compliance, Hager recommends the use of anti-friction or ball bearing hinges with our door closer products.
The recommended temperatures for prolonged closer use is between -40° F (-42° C) and 150° F (66° C)
Any certified BHMA/ANSI A156.4 door closer, regardless of manufacturer, that is installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door
If arms are ordered separately, there will be a significant difference in price than if purchased with a closer as a complete assembly.
See adders for more information (add the list price of the option to the list price of the closer and take standard discounts).
Accessories may not be available in all finishes. Please contact Hager for availability and lead time.

Special Note 1:

For use with 5914-Rev 1 bracket for parallel arm mount

Springs:

One piece seamless steel spring tube
Double heat-treated, steel-tempered springs
Precision-machined, heat-treated steel piston

Valves:

Adjustable backcheck, sweep, and latching valves- standard
Delayed action valve - optional
Staked valves - standard

Warranty:

Lifetime warranty