

L-700-RX, AFDL

No Vision Door Louver

PRODUCT CUT SHEET

AnemostatDOOR PRODUCTS


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

For 13/4" Thick Doors

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Inverted "V" Design
- Dlades 24 Ga. Steel; Hemmed Edges
- Countersunk Mounting Screw-Holes
- ◆ #8 x ¾" Phillips Head SMS
- Available in Uneven and Fractional Sizes
- Free Area 55%
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options See Color Chart on <u>ngp.com</u>
- Aluminum Insect Screen 22 Ga. 1/8" Square Mesh Installed on Exterior Side Unless Requested Otherwise
- Torx Security Screws
- Oalvanneal A40 Steel
- Zinc Electroplating (Not Available on Insect Screen)

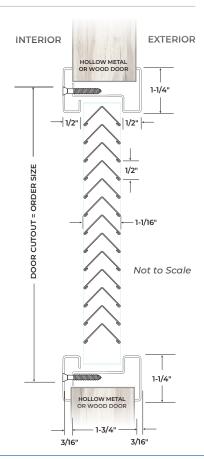



Undersized 1/8" for clearance

Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- 1/16".

NGP-LIT-L-700-RX-PCS-0225-A

NATIONAL GUARD PRODUCTS, INC.

