

L-FRA100

Low Profile Lite Kit


PRODUCT CUT SHEET

For 13/4" Thick Doors and 3/16", 1/4" or 5/16" Glass

- 18 Ga. Cold Rolled Steel
- Mitered and Welded Corners
- Welded Reinforcing Clips at Corners
- Countersunk Mounting Screw-Holes
- ♦ #8 x 1¾" Phillips Head SMS
- Available in Uneven and Fractional Sizes
- Gray Primer (GPZ) Powder Coat Finish

Available Options

- Powder Coat Color Options See Color Chart on <u>ngp.com</u>
- Torx Security Screws
- Galvanneal A40 Steel
- Zinc Electroplating
- Glass & Glazing Tape
- ▶ Lead Lining ½16" Thick

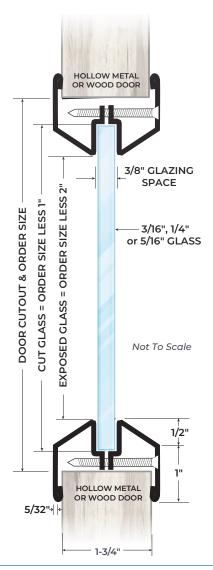





Designed for Use on 1¾" Thick Doors Manufactured Within Door Industry Tolerance of +/- ⅓16".

NGP-LIT-L-FRA100-PCS-1223-A





Tempered Glass

PRODUCT CUT SHEET


PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

- 1/4" Thick Clear Heat Treated Glass
- Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- Breaks Into Small Harmless Fragments
- Oan **NOT** Be Cut After Manufacturing
- 11" Minimum Height.
- Manufactured in USA
- NOT Fire-Rated.
- STC 31 Rating

Impact Safety Rating Information

Complies With IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II).



NGP-GLA-TEMPERED-PCS-1223-A





Glazing Tape

Closed Cell PVC Foam

PRODUCT CUT SHEET

L-GT-114 - $\frac{3}{8}$ " Wide x $\frac{1}{4}$ " Thick - 50' Rolls

L-GT-116 - 3/8" Wide x 1/16" Thick - 200' Rolls

L-GT-118 - 3/8" Wide x 1/8" Thick - 100' Rolls

L-GT-132 $- \frac{3}{8}$ " Wide x $\frac{1}{32}$ " Thick - 200' Rolls

L-GT-316 - 3/8" Wide x 3/16" Thick - 50' Rolls


Material

Closed Cell PVC Foam Glazing Tape With Adhesive Both Sides Color is Black

For Use in Lite Kits on UL10C Positive-Pressure Fire-Rated Wood or Steel Doors Rated Up To:

- 20 Minutes With TEMP20™ or Fire-Protective Wired Glass
- 90 Minutes With Protect3™
- ▶ 180 Minutes With Pyran® Platinum F or Pyran® Platinum L





NGP-GLA-L-GT-114-116-118-132-PCS-1223-A

