



L-1900, FLDL

Fire-Rated Fusible Link Louver

PRODUCT CUT SHEET

PROJECT:

SUBMITTED BY:

DATE:


NOTES:

For 1 3/4" Thick Doors Up To 90 Minutes

- ▶ Blades Close When Activated by Fire/Heat
- ▶ 18 Ga. Cold Rolled Steel Frame
- ▶ 18 Ga. Cold Rolled Steel Adjustable "Z" Blades
- ▶ Mitered Corners Secured with Reinforcing Clips
- ▶ Stainless Steel Spring
- ▶ 165° Fusible Link
- ▶ #8 x 3/4" Phillips Head SMS
- ▶ Free Area 40%
- ▶ Gray Primer (GPZ) Powder Coat Finish

Available Options

- ▶ Powder Coat Color Options - See Color Chart on www.ngp.com
- ▶ Aluminum Insect Screen - 22 Ga. 1/8" Square Mesh Installed on Exterior Side
- ▶ Torx Security Screws
- ▶ Galvanneal - A40 Steel

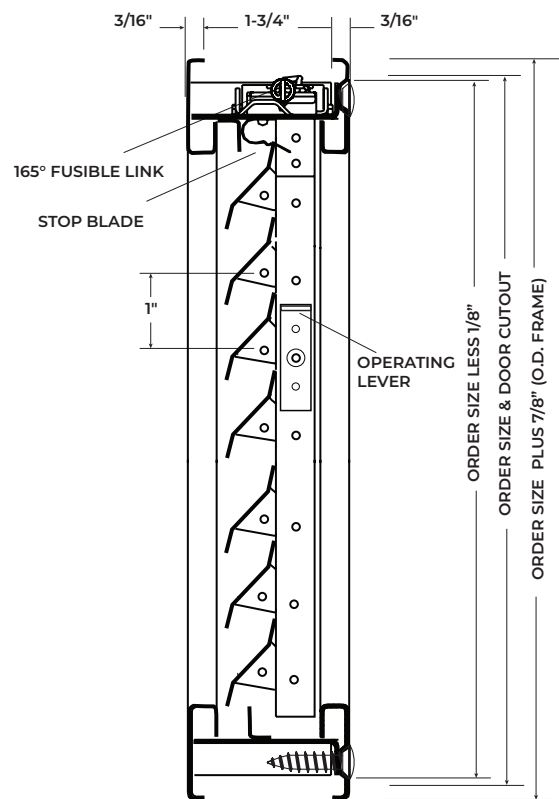


Undersized 1/8" for Clearance
Not to Scale



Size Information:
Available in Whole Inch Increments
Minimum size: 10" x 6"
Maximum size: 24" x 30"



*up to
90 minutes



NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

NGP-LIT-L-1900-PCS-0822-A

ngp.com
1-800-NGP-RUSH