

PRODUCT NUMBER: PSLIDE

SLIDING DOOR TYPES: Barn Doors and Pocket Doors.

AVAILABLE FINISHES: Black Suede Powder Coat, White Suede Powder Coat, Clear Anodized.

PRODUCT DIMENSIONS:

- L x W x H – 36" x 2.5" x 3".
- Can be trimmed to fit door openings as small as 30" wide.
- Two 20" slim tracks come by default. Additional tracks needed for doors wider than 40".

MAXIMUM DOOR WEIGHT: 330 lbs.

- Supports door widths up to the maximum door weight capacity.

LENGTH OF TRACK: Two 20" tracks.


- Additional tracks are needed for doors wider than 40".

ELECTRICAL:

- Input for Power Adapter - 120V, 50/60HZ, 2.7A.
- Open-Time Dial: Adjust between 0-24 seconds.
- Customizable DIP Switches.
- Power level for lightweight or heavy doors, beeper alerts.
- Reverts to a manual sliding door in the event of power failure.

CERTIFICATIONS AND STANDARDS:

- Operator certified to ANSI/UL standard 325 for automatic closing doors.
- ANSI BHMA A156.38. This product is designed and tested to:
 - Withstand 300,000 cycles.
 - Obstruction force when closing less than 15 lbs.
 - Closing speed less than 6 inches/second.
 - Setup Hold Open time delay more than 5 seconds.
- Americans with Disabilities Act (ADA): These door operators can be installed and adjusted to conform with ADA regulations.
- Door activators comply with part 15 of FCC Rules.

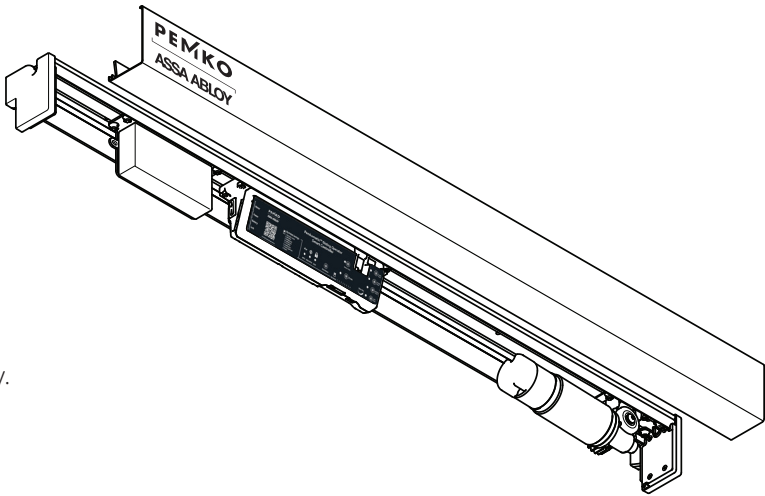

MOUNTING:

- Mounts to header.
- Optional adapter bracket (AB-PSLIDE) available for non-header installations.
- Recess into the wall for full-opening width access.
- Field Reversible (Left-hand supplied).

SPECIFICATIONS OF DOOR ACTIVATORS:

	Push Button (PB-PSLIDE)	Wave Sensor (WS-PSLIDE)	KeyPad (KP-PSLIDE)
Power Supply	3V – Two CR2032 Batteries		
Life of Battery	up to 12 Months	up to 6 Months	up to 12 Months
Working Range	50 ft	50 ft	50 ft
Product Size (L x W x H)	5.5" x 1.5" x 0.5"	5" x 1.5" x 0.5"	3.5" x 3" x 1.5"

Pemko
5535 Distribution Dr.
Memphis, TN 38141
www.pemko.com

Memphis, TN USA
P: 800 824 3018
F: 800 243 3656

Ventura, CA USA
P: 800 283 9988
F: 800 283 4050

Vaughan, ON CA
P: 800 461 3007
F: 800 461 8989