


TD-CHFS

Grade-1 Heavy-Duty
Full Surface Continuous Gear Hinge

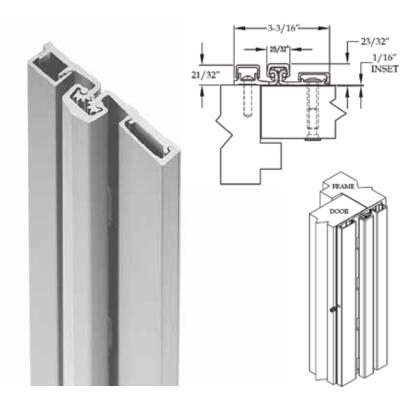

Specifications

Use Typically used for retrofit applications - can be used with narrow face frames

(as narrow as 7/8")

Inset 1/16" door inset

Door Weight Up to 450 lbs.

Door Width Up to 48"

Door Thickness 1-3/4" thick

Lengths 83", 95"

Fasteners 12–24 x 1" Phillips, pan head, undercut self-drilling, thread-forming tek machine screws

for frame and $\frac{1}{4}$ " – 20 sex bolts and shoulder bolts for door

Finish Clear Anodized Aluminum Warranty Limited lifetime warranty

Code compliance

ANSI/BHMA A156.26-2017

UL/cUL Approved for metal fire doors rated up to and including 90 minutes,

wood doors up to 60 minutes

BAA Meets Buy Amercian Act - Made in USA





