





TD-DRIP-52

RAIN DRIP GUARD

2-1/2" W x 52" L

FINISH: MILL FINISH ALUMINUM

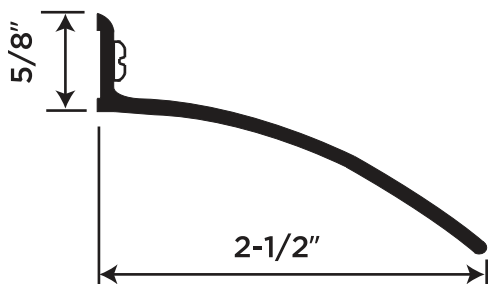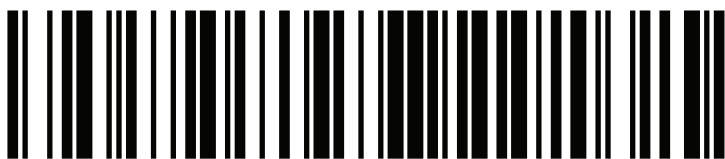

INSTALLATION INSTRUCTIONS

Suggested length should be 4" longer than the width of the door.

1. Center entire length on frame over door.
2. Fasten using screws provided.
3. Ensure top of door clears rain drip when opened or closed.



ADA Compliant



Meets UL10B, UL10C and
UBC 7-2 (1997) Category J



Fire-Rated

MATERIAL FOR USE IN LISTED STEEL FRAMES AND CLASSIFIED HOLLOW METAL STEEL COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 3 HOURS, WOOD COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 1-1/2 HOURS, AND WOOD CORE FIRE DOORS ARE RATED 20 MINUTES WITHOUT HOSE STREAM.

TRUDDOOR.COM | PHOENIX, AZ





TD-DRIP-52

RAIN DRIP GUARD

2-1/2" W x 52" L

FINISH: MILL FINISH ALUMINUM

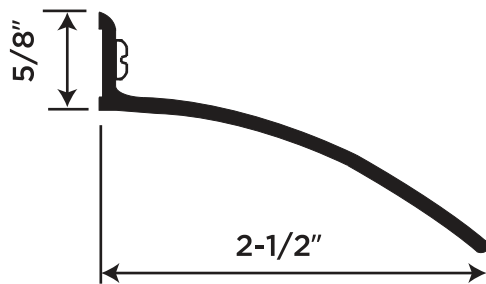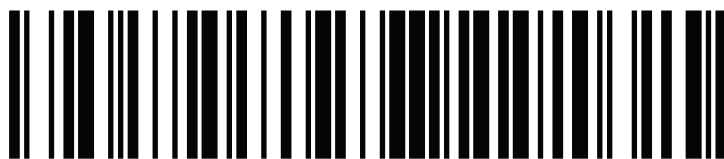

INSTALLATION INSTRUCTIONS

Suggested length should be 4" longer than the width of the door.

1. Center entire length on frame over door.
2. Fasten using screws provided.
3. Ensure top of door clears rain drip when opened or closed.



ADA Compliant



Meets UL10B, UL10C and
UBC 7-2 (1997) Category J



Fire-Rated

MATERIAL FOR USE IN LISTED STEEL FRAMES AND CLASSIFIED HOLLOW METAL STEEL COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 3 HOURS, WOOD COMPOSITE TYPE FIRE DOORS ARE RATED UP TO AND INCLUDING 1-1/2 HOURS, AND WOOD CORE FIRE DOORS ARE RATED 20 MINUTES WITHOUT HOSE STREAM.

TRUDDOOR.COM | PHOENIX, AZ