




PRODUCT SPECIFICATIONS
For more information visit www.hagerco.com

190S

Applications

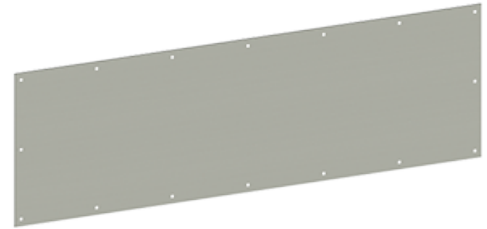

PRODUCT SPECIFICATIONS

Certifications:

EPD

NFPA 80 Standards 6.4.5 Protection Plates

6.4.5.1 Factory installed protection plates shall be installed in accordance with the listing of the door

6.4.5.2 Field installed protection plates shall be labeled and installed in accordance with their listing

6.4.5.3 Labeling shall not be required where the top of the protection plate is not more than 16" (406 mm) above the bottom of the door

Meets ANSI A156.6 for J101 Metal Armor Plate, J102 Metal Kickplate, and J103 Metal Mop Plate

Features:

4 Beveled Edges

Finishes:

US3, US4, US10, US10B, DBZ, US19, US28, US32, US32D
(US3 and US4 are unavailable above 24" tall)

How To Order:

Plates are sized on even inches. Odd sizes available and priced to next larger size.

Material:

Aluminum, Brass, Bronze, Stainless Steel

Notes:

Furnish item number, height, width, and finish (i.e., 190S – 6" x 30", US32D)

May be ordered with countersunk holes (specify "CSK") at extra charge

Options:

UL listed for US32 and US32D with screw fasteners (must specify UL stamp) based on 48" maximum height by 46" maximum width

Self-adhesive tape available on all plates

Spanner head screws

Torx head screws

Round corners - specify 196R

Wrap around side and bottom return

0.125" material

Product Name:

Door Protection Plate

Thickness:

0.050" (1 mm)