



PEMKOMATIC™

Effortless Access with Sliding Door Automation

PEM/KO
ASSA ABLOY

Experience a safer
and more open world

Our PemkoMatic™ (PSLIDE) low energy automatic door operating system offers versatile electromechanical solutions for manual sliding doors, and features convenient multi-access options including a wave-to-open sensor, push button, or keypad. Designed to fit seamlessly with both pocket and sliding doors, it is ideal for new installations as well as retrofitting existing openings. The system features a sleek cover, combining functionality with a clean, aesthetically pleasing design.

APPLICATIONS:

- Office Buildings
- Healthcare Facilities
- Hospitality
- Educational Institutions
- Museums and Galleries



FEATURES	BENEFITS
User-friendly interface with three customizable modes for versatile door operation	Ensures personalized security and accessibility requirements to meet the unique needs of every user: - Green/Auto Mode: Ideal for everyday use with open-assist enabled and the door unlocked - Blue/Hold Open Mode: Keeps the door fully open by default for convenience - Red/Lock Mode: Open-assist is disabled, and the door locks securely, allowing access only through a keypad or door activator
Quiet operation	Experience smooth and silent door movement, enhancing comfort and functionality in commercial spaces
Durable construction tested to meet rigorous industry cycle standards	Built for long-lasting performance, ensuring reliable functionality and security through regular use
Multiple access options	Experience seamless and versatile entry with multiple access options: wave sensor, numeric keypad, or push button.
Adjustable open time from 0 to 24 seconds, easily configured via a dial under the control panel	Customize door operation to match your specific needs, ensuring optimal convenience and efficiency

SPECIFICATIONS:

- Product Number: PSLIDE
 - Sliding Door Types: Barn doors and pocket doors
 - Product Dimensions: 36" L x 2.5" W x 3" H
 - Can be trimmed to fit door openings as small as 30" wide
 - Maximum Door Weight: 330 lbs
 - Supports door widths up to the maximum door weight capacity
 - Maximum push force: 65 lbs
 - Length of track: Two 20" slim tracks
 - Additional tracks are needed for doors wider than 40"
 - Electrical
 - Input for Power Adapter - 120V, 50/60HZ, 2.7A
 - Open-Time Dial: Adjust between 0-24 seconds
 - Customizable DIP Switches
 - Power level for lightweight or heavy doors, power-boost functionality, beeper alerts
 - Reverts to a manual sliding door in the event of power failure
 - Certifications and Standards
 - Operator certified to ANSI/UL standard 325 for automatic closing doors
 - Tested to ANSI A156.38, Low Energy Power Operated Sliding and Folding Doors
 - Can be installed and adjusted to meet ADA Standards
 - Door activators comply with part 15 of FCC Rules
- Mounting
 - Mounts to header
 - Optional adapter bracket available for non-header installations
 - Recess into the wall for full-opening width access
 - Field Reversible (Left-hand supplied)
 - Kit Components:
 - One operator, two tracks, two hand wave sensors, one keypad, one mode pad,
 - 16 wood screws, eight sheet metal screw, one hex key, one screwdriver one wrench
 - Double-sided tape, cables, cable retaining clips, stickers for activators




THE DEVICE

FINISHES:




Black (PSLIDE-BSP/36)



White (PSLIDE-WSP/36)



*Clear Anodized Aluminum
(PSLIDE-C/36)*

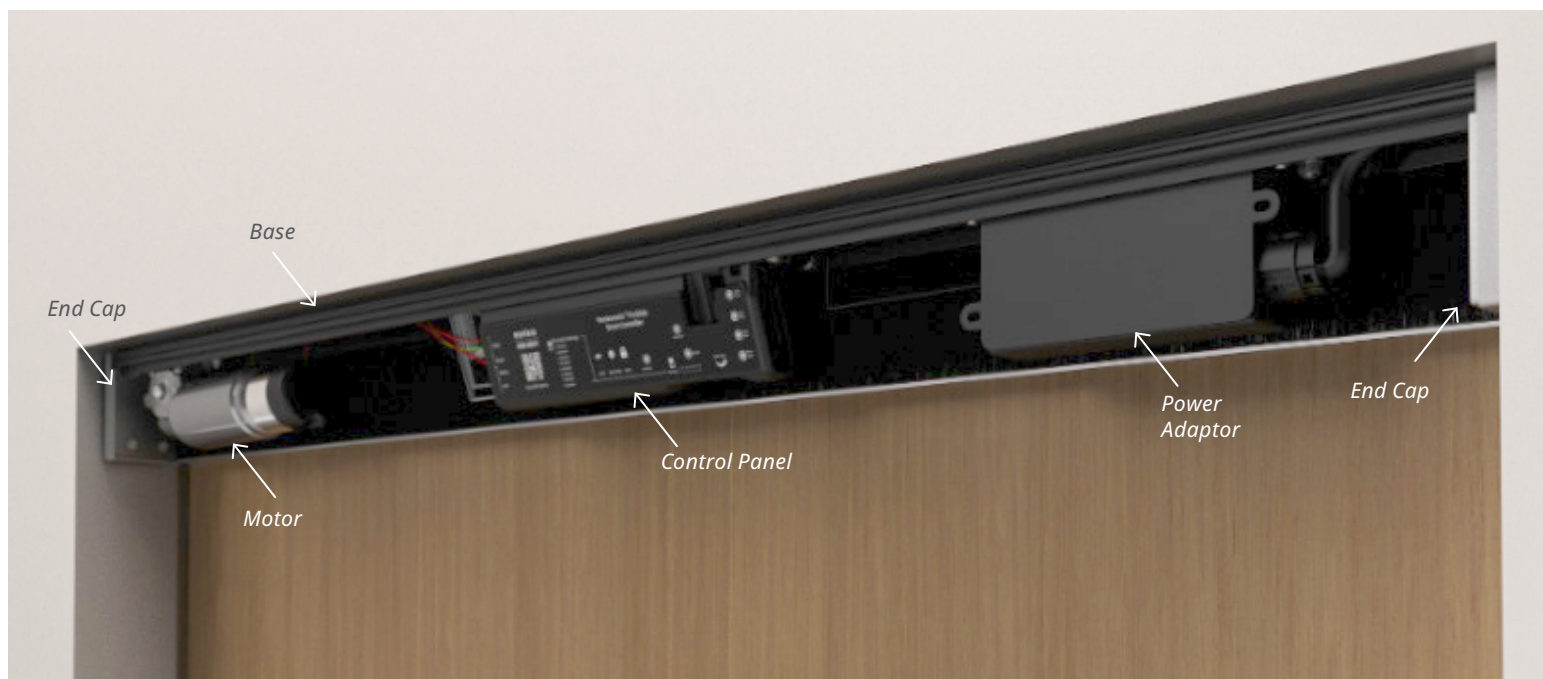

COMPATIBLE PARTS

PemkoMatic™ is designed with multiple compatible parts for seamless integration and versatility.



KP-PSLIDE
PemkoMatic Keypad



PB-PSLIDE
PemkoMatic Push Button



WS-PSLIDE
PemkoMatic Wave Sensor



RM785
Rockwood Flush Pull



503SF
LaFonte Flush Cup Pull



RM790
Rockwood Flush Pull



200 Series End Piece

COMPATIBLE SLIDING SYSTEMS


PemkoMatic™ is compatible with a variety of sliding systems, offering enhanced flexibility and adaptability.



*BLD-FT01 / BLD-FT02 Builders
Series Flat Track*



H180A Hardware Kit

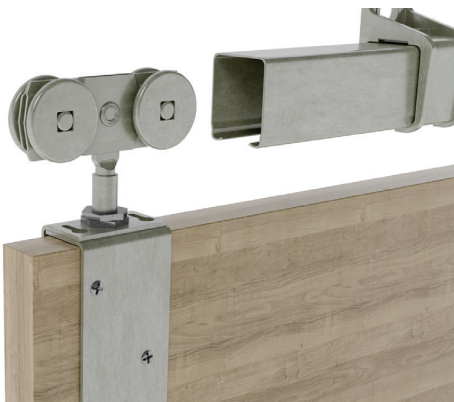

H300S Series Henderson Steel



*DSG-FT-05 / DSG-FT-06 Designer
Series Flat Track System*




*LP200A Henderson Concealed
Mounted Track System*



PF28200A Pocket Frame Kit

COMPATIBLE SLIDING SYSTEMS CONTINUED

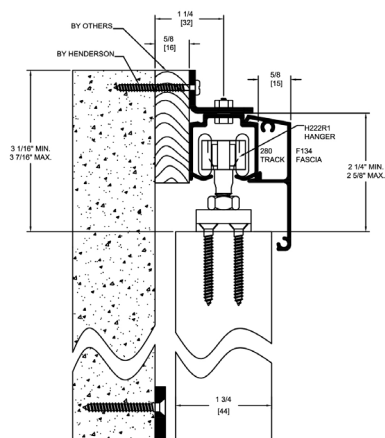

SHS80 Series Hardware Kit



280_SWTKIT Side Wall Track System



TBS200A Series Through-Bolt Sliding Hardware System



TBS250A Series Through-Bolt Sliding Hardware System



W60, W70, W80, W90, W100 Stainless Steel Sliding Track Hardware Systems



H440A-SW Series Henderson Aluminum

The ASSA ABLOY Group is the global leader in access solutions.
Every day, we help billions of people experience a more open world.

ASSA ABLOY Opening Solutions leads the development within door openings and products for access solutions in homes, businesses and institutions. Our offering includes doors, frames, door and window hardware, mechanical and smart locks, access control and service.

PEMKO
ASSA ABLOY



Pemko
5535 Distribution Drive,
Memphis, TN 38141
www.pemko.com
orders.pemko@assaabloy.com

Memphis, TN USA
P: 800 824 3018
F: 800 243 3656

Ventura, CA USA
P: 800 283 9988
F: 800 283 4050

Vaughan, ON CA
P: 800 461 3007
F: 800 461 8989